





N5-111

MEDIUM RESOLUTION DAY/NIGHT (REQUIRES LENS)

Installation Tips

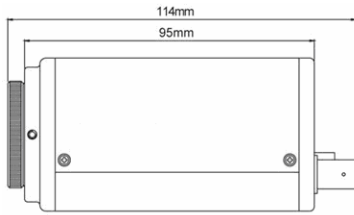

1. Avoid places where there is direct sunlight.
2. Do not directly touch the CCD element. If necessary, use a soft cloth moistened with alcohol to wipe off the dust.
3. Avoid places where temperatures exceed 50° C or more
4. Avoid places where there is frequent vibrations or shocks
5. Please input power regulator DC 12V.
6. When any abnormalities occur, make sure to unplug the unit and contact your local dealer
7. Remove the cover, loosen up the two levers located around the lens by turning them counterclockwise, turn cylinders around the lens to adjust zoom and focus. Tight levers after reaching desired adjustment.
8. Turn metallic cylinder around lens mount to adjust focus.

Specifications

Image Sensor	1/3" CCD 4.82 x 3.64 color
Picture Elements	EIA/NTSC 510H x 492V CCIR/PAL 500H x 582V
Horizontal Frequency	EIA/NTSC 15.734kHz CCIR/PAL 15.625Khz
Vertical Frequency	EIA/NTSC 60Hz CCIR/PAL 50Hz
Clock Frequency	EIA/NTSC 19.0699Mhz CCIR/PAL 18.9375 Mhz
Scanning System	2:1 Interlace
Horizontal resolution	420 Lines
Signal to Noise ration	52dB
Illumination	0.1 Lux
Electronic Shutter Speed	1/120000 sec (Linear)
Lens	C & CS mount
Auto Iris	DC Video drive
Video Output	1V pp 75 Ohms
Audio Output	2V pp 50 Ohms (max)
Gamma	0.45
White Balance	Auto tracing
Backlight Compensation	ON/OFF switchable
Gain Control	ON/OFF switchable
Mirror reverse picture	Switchable
Digital zoom	2 x
Storage Temperature	-30C to +60C
Operating Temperatures	-10C to +45C
Weight	265g
Dimensions	50.5 x 50.5 x 114mm
Power Supply	12V DC@ 150ma